

**This product may be purchased from Connevens Limited secure online store
at www.DeafEquipment.co.uk**



DeafEquipment.co.uk

Solutions to improve the quality of life



Clearview

Caller Display Unit

User Guide

To delete a record from the call list

1. Press REVIEW FORWARD or BACKWARD repeatedly until the desired record is displayed.
2. Press CLEAR twice.

To delete all records from the call list

Press CLEAR for 5 seconds, until you see the message indicating that there are no calls.

Date/Time

Date and time will automatically be updated after receiving a call.

Adding telephone numbers and names into the directory

1. Press DIR, the display shows "XX USED YY FREE", where XX stands for the number of used entries and YY stands for the number of free entries, out of the 50 direct memories (16 digits for telephone numbers, 15 characters for names).
2. Press DIR, the display will show the first record.
3. Press STORE, the display will show "0" in the telephone number field.
4. Press REVIEW FORWARD or BACKWARD to select the digit. STORE to advance to the next digit. CLEAR for correction.
5. When all digits are OK, press STORE twice in quick succession to jump to the name field.
6. Press REVIEW FORWARD or BACKWARD to select the character. Press STORE to advance to next character.
7. When all characters are OK, press STORE twice in quick succession to finish this record setting.
8. Repeat steps 1 to 7 for next record.

Dialling a record from directory

1. Press DIR twice, use REVIEW FORWARD/BACKWARD to scroll to the record that you want to dial.
2. Press DIAL, the display shows "LIFT HANDSET".
3. Lift handset to continue the call before time-out of 10 seconds.

Adding a record to the directory from call list

1. Press REVIEW FORWARD or BACKWARD to scroll through the incoming record.
2. Press STORE, all information on the display will be transferred to the directory mode automatically. You can edit or enter the name if desired.
3. Press STORE twice in quick succession, the information will be stored and idle mode resumes.

Editing a record in the directory

1. Press DIR twice, the display shows the first record. Use REVIEW FORWARD or BACKWARD to scroll to the record that you want to edit.
2. Press STORE, use CLEAR to cancel back to incorrect digit, use REVIEW FORWARD/BACKWARD to select correct digit. Press STORE to advance to next digit, continue to replace digits.
3. Press STORE twice in quick succession to jump to the name field. Use CLEAR to cancel back to incorrect character, use REVIEW FORWARD/BACKWARD to select correct character. Press STORE to advance to next character, continue to replace characters.
4. Press STORE twice in quick succession to finish this record.

Viewing a record in directory

1. Press DIR twice, the display shows the first record.
2. Press REVIEW FORWARD or BACKWARD to view the records.
3. Press DIR to quit or if no button is pressed display returns to time after 30 seconds.

Deleting a record from directory

1. Press DIR twice, use REVIEW FORWARD or BACKWARD to scroll to the record that you want to delete.
2. Press CLEAR in quick succession twice to delete the record.
3. Press DIR to quit.

Care of your Clearview Caller Display

The Caller Display should be cleaned with a soft dry cloth. It is important to unplug the unit from the telephone socket prior to cleaning. Do not apply polishes or strong cleaning agents as these could damage the moulding.

THUNDERSTORMS: During thunderstorms, lightning may strike telephone lines, this can damage any equipment attached to a line, including telephones. If possible, unplug your telephone from the socket in the event of a storm.

Conditions of use

Your Geemarc Clearview Caller ID has been approved for use on private direct exchange lines and business lines. It is also approved for use with approved compatible PABX's.

Your exchange line should be a standard exclusive (DEL) and not a shared service or party line.

Your line should be able to cater for either Loop Disconnect (PULSE) or Multi Frequency (TONE) dialling. If you experience any difficulty contact your local network operator.

Approval

This product complies with the requirements of EC directive 89/336 EEC including LVD directive 73/23 EEC. Any modification of the unit or connection to unauthorised accessories may affect this compliance.



Guarantee

From the moment your Geemarc product is purchased, Geemarc Telecom Ltd guarantee it for one year. During this time, all repairs or replacements at our option are free of charge. Carriage to Geemarc is payable by the sender. The guarantee does not cover accidents, negligence or breakages to any parts. The unit parts must not be tampered with or taken apart by anyone who is not an authorised Geemarc representative.

The guarantee of Geemarc Telecom Ltd in no way limits your legal rights.

Should you experience a problem then contact our helpline or the retailer from whom you purchased your Geemarc product.

If you do have to return the product to Geemarc Telecom Ltd, please enclose a note of your name and address with details of the problem being experienced. Also, enclose a copy of your purchase receipt and a cheque for £5 to cover return postage and packing. YOUR RECEIPT IS YOUR GUARANTEE.

Please note: The guarantee applies to the United Kingdom only.



Geemarc Telecom Ltd
5 Swallow Court
Swallowfields
Welwyn Garden City
Hertfordshire AL7 1SB

Helpline - 01707 384438 Facsimile - 01707 372529

geemarc
Telecom

Introduction

Thank you for choosing Geemarc's Clearview Caller Display. You can expect many years of quality service.

Please read the instructions carefully before use and keep this User Guide for future reference.

The Clearview stores up to 50 names and numbers in its call log. The display is extra large, allowing you to read it from across the room, without the need to walk to the display.

Also it serves as a jumbo LCD clock, which never has to be set, since the correct time is maintained automatically by the caller ID information.

The Clearview can also hold a directory of 50 names and numbers. If an incoming number matches a record in the directory, the assigned name (such as FATHER, OFFICE, etc) will be mapped and shown on the display. You can build up your own directory.

Installation

Siting your Clearview Caller Display

Position your Clearview Caller Display within 2 metres of a telephone socket.

Do not stand it on carpets or other similar surfaces which might generate fibres. Do not expose the unit to high temperatures by siting near radiators etc. Keep the unit dry and do not operate in outdoor conditions.

Do not cover or enclose the machine. Allow a free flow of air to its surfaces.

NOTE: We advise that the unit be placed on a table cloth or similar, as rubber feet can mark some surfaces.

NOTE: Do not connect the line cord into the telephone socket until after Insert Batteries section has been completed.

Insert Batteries



Open the battery compartment on the underside of your Clearview Caller Display by pushing it towards the back edge. You will need 4 x AA alkaline batteries (NOT INCLUDED).

WARNING - Calls list back up time is 1 minute. Do not remove all batteries or the stored memories may be lost. To ensure the memories are not lost users should take out one battery at a time and replace with a new one before taking out the next battery. Change all 4 batteries when the battery low symbol shows in the display. Unplug telephone line before changing batteries.

NOTE - The directory memory is non volatile and will not be lost when changing batteries.

Check your telephone wall socket

Should you not have a modular telephone socket as shown, please contact your local British Telecom or other Network Operator office.

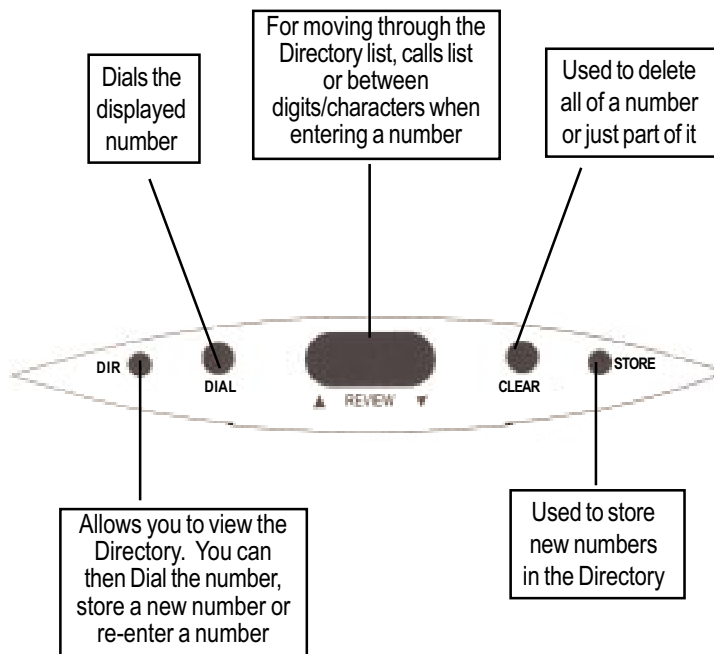

Connect the leads

1. Plug the Clearview Caller Display line cord in to the telephone socket.
2. To connect a telephone to your Clearview Caller Display, plug the telephone line cord in to the spare socket of the doubler at the end of the Clearview line cord.

Caller Display Service

Your Clearview Caller Display receives and displays caller information, which is transmitted over the BT network and other network providers. The information will include the date and time the call is received. And in most cases the caller's phone number.

IMPORTANT: To enable your Clearview Caller Display to display information transmitted via BT or another network providers you will first have to subscribe to that networks Caller Display Service.

Your Clearview Caller Display is now ready for use

Operation

Setting LCD contrast

You may select the LCD contrast level (factory setting is level 4) to make the screen lighter or darker.

1. Press REVIEW FORWARD for 5 seconds, until you see "LCD CONTRAST".
2. Press REVIEW FORWARD repeatedly to scroll through the 8 contrast settings.
3. Press STORE to end.

Call list

New calls indicator

A 'NEW' icon will appear on the display to tell you that new calls have been received since you last checked the calls list.

Reading records in the call list

Pressing the REVIEW FORWARD/BACKWARD button will display how many new calls you have received and the total number of calls stored.

1. Press the REVIEW FORWARD button to display the most recent call.
2. Press the REVIEW FORWARD button again to display the next most recent call. Continue pressing until the display shows 'END OF LIST'.
3. Press the FORWARD button at any time to move up the list.

Dialling a record from call list

1. Press REVIEW/FORWARD/BACKWARD to view and scroll to the record in the call log.
2. Press DIAL, the display shows "LIFT HANDSET".
3. Lift handset to continue the call before time out of 10 seconds.



Helpline - 01707 384438