

**This product may be purchased from Connevens Limited secure online store
at www.DeafEquipment.co.uk**



DeafEquipment.co.uk

Solutions to improve the quality of life





TECHNICAL SPECIFICATION

Microphone Input:

XLR, balanced, low noise.
15V DC Phantom power (selectable).
Sensitivity: -70dB at high gain
-55dB at low gain.
Overload level: -20dBu at high gain
-5dBu at low gain.

Line - level Input:

6.4 mm Jack socket, fully balanced (unbalanced with mono plug).
Sensitivity: -30 dBu. Overload at +20 dBu High Impedance Input.
Overload protected.

Slave I/O:

Insert point for connecting Ampetronic Phase Shifter, etc.
Can be used as output for recording.
Signal level 1 V RMS. (+2.7 dBu)

Preamp Power:

± 15V DC max 0.3A for powering Ampetronic Microphone Preamplifiers and external processors.

Metal Loss Corrector:

Allows correction of system frequency response when losses occur due to metal in the building. Adjustable from 0 to 3 dB per octave, with constant gain 1 kHz. This does *not* compensate for the power loss caused by the metal.

Compressor / AGC Control:

36 dB control range, with attack / decay time constants optimised for speech.
Front panel indication in 6 dB increments.

Loop Current:

7 Amp peak. Absolute peak current >10 A.
Front panel indication in 2dB increments with PPM response.

Output Voltage:

Greater than 19 V peak, to enable good frequency response with larger, inductive loops.
Patented Circuitry prevents clipping, to ensure full EMC compliance.

Loop Impedance:

Designed for SINGLE-TURN loops, with DC resistance between 0.3 Ω and 1.2 Ω.

Area Coverage:

The nominal area that can be

covered for a rectangular loop is 250 m² (2600ft²). Where the aspect ratio is narrow and long, see handbook.

If losses occur due to metal or unusual loop position, then the area will be reduced. Please contact Ampetronic for advice.

Loop Condition Testing:

Resistance of the loop is tested at switch-on. The output will only be connected if the loop resistance is between 0.25 Ω and 3 Ω.

Additional testing during normal running also checks for high loop resistance, using the normal audio signal.

A front panel LED indicates loop error.

Frequency Response:

80Hz to 6.5kHz ±1.5dB at low level, measured as loop current. High frequency high signal level response is a function of loop size, loop current and signal content to ensure that no RFI generation takes place. Internal time constants are very short.

AC Power Input:

230 V nominal, 45 – 65 Hz, 115V AC version available.
120 VA peak power.
Fuse: T 0.63A 250V.

Ventilation/cooling:

Forced ventilation is used, with air intake on the left side edge, and warm air exhaust from the rear through ventilation grilles.

Dimensions:

Width: 430 mm.
Height: 44 mm.
Depth: 220 mm.

Weight:

3.75kg.

CE Compliance:

The equipment meets all the applicable EMC and safety standards.

Options:

Rack mounts 1U space. (Rack brackets supplied).
Wall mounting with the WM252 bracket set.

SPECIFICATION

AMPETRONIC

ILD 252

INDUCTION LOOP DRIVER

The ILD252 Loop Driver has been designed for a wide range of applications such as medium sized churches, conference & lecture rooms, meeting rooms, small theatres, etc. The equipment maintains the traditional Ampetronic high quality vocal and music reproduction, while adding new features to improve performance and operational facilities.

The ILD252 has extensive monitoring and indication facilities. In addition to the LED metering of compression and loop current, the amplifier includes a loop checking feature that tests the loop for high or low resistance at power-up and indicates any fault. Overload and over-temperature conditions are also monitored and indicated on the front panel.

In common with all Ampetronic's induction loop drivers, the ILD252 uses constant-current drive, which is necessary to achieve full compliance with national and international loop system standards. The equipment has safeguards designed in to ensure that all current EMC and safety standards are complied with under all practical operating conditions.

An integral metal loss corrector provides compensation for the frequency-dependent loss caused by metal in building construction. Contact Ampetronic for more information about the effect on loop design and performance of metal in building construction.

5 Year Warranty

The Complete System Capability


AMPETRONIC

Ampetronic Ltd. Northern Road, Newark, Nottinghamshire. NG24 2ET United Kingdom

Tel: +44 (0) 1636 610062 Fax: +44 (0) 1636 610063



PLASA
PROFESSIONAL LIGHTING
AND SOUND ASSOCIATION

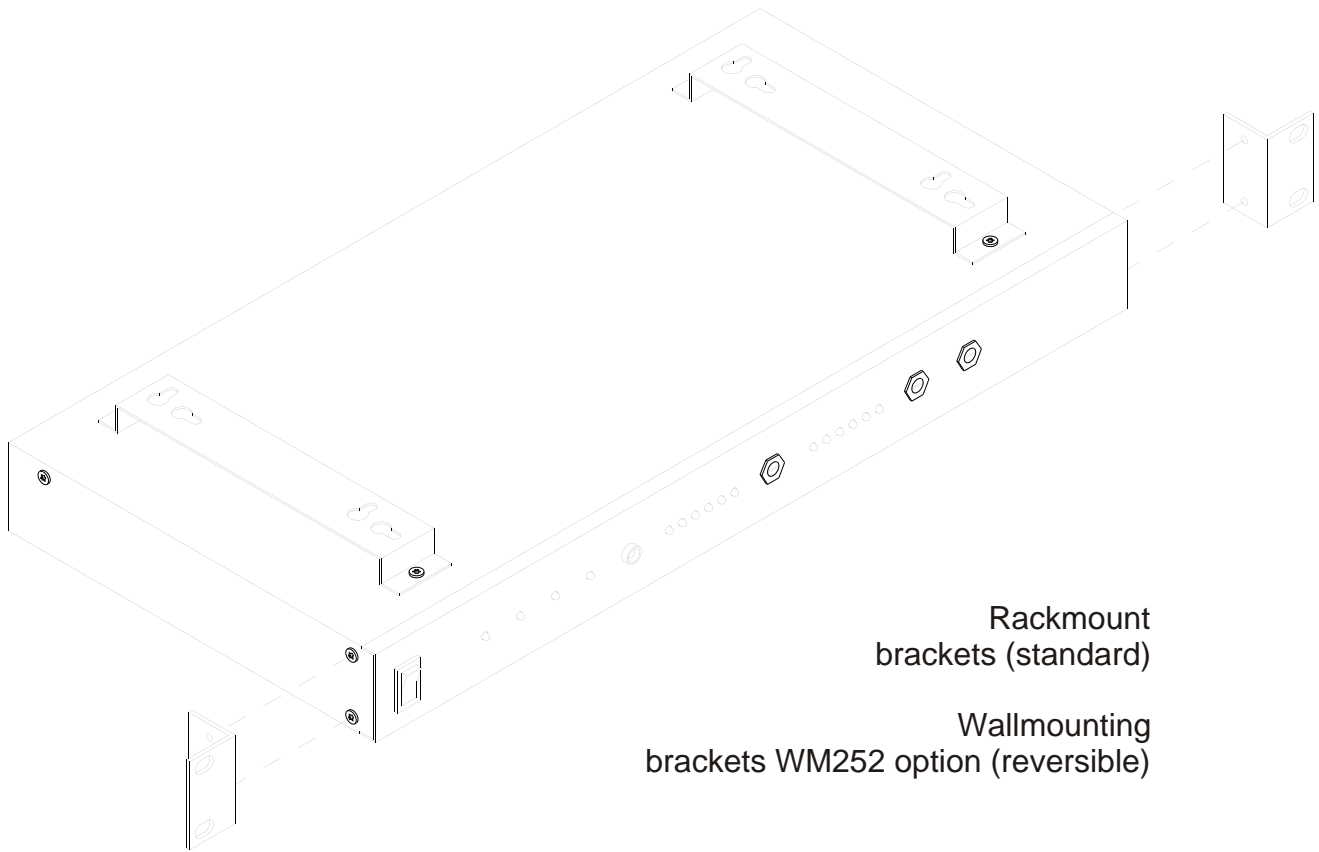

Rackmount
brackets (standard)

Wallmounting
brackets WM252 option (reversible)